


Mini-Swinger



Mini-Swinger

Small low voltage retractable adjustable recessed downlights.

Features

- "Pull down" feature enables a full 90° of vertical tilting and 350° horizontal rotation.
- Tilting angle can be positioned and locked by allen key.
- Housing made of die cast aluminium and designed for optimum heat dissipation.
- Stirrup made in heat resistance thermoplastic.
- Installation springs suitable for ceiling thickness up to max. 25mm.
- Transformer in pre-wired remote unit has to be ordered separately.
- Designed and manufactured to comply with European standard EN 60598.

Applications

- Ideal for both wall washing or highlighting in areas with less available ceiling surfaces or smaller spaces.
- Multiple lamp types, including HID and Halogen.
- Compact low voltage spotlight having great flexibility in interchangeable spaces.
- Areas: retail, department stores, restaurants, hotels, health facilities, showrooms, exhibits.



Mini-swinger

5143

50W 12V GU5.3 MR16 

Transformer not included. To be ordered separately.






IP20   

5675







35W GX10 ES50 Metal halide 

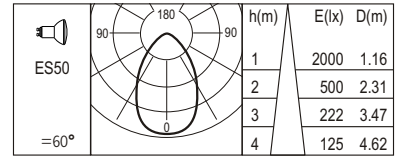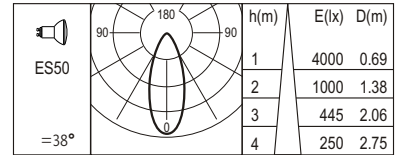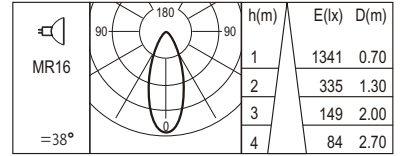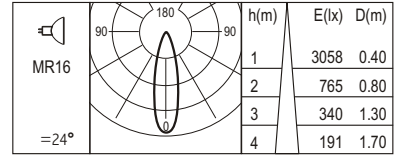Control gear not included. To be ordered separately.


IP20   



Mini-Swinger Accessories Table

Accessories	Lens System	Coloured Filters	Refractor	UV Filter	Honeycomb Louvre
Light Source					
MR16 	2082	2083	2113	2122	2271


Accessories

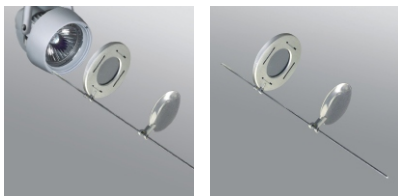

Lens System

Available in colour 10

Comes with a range of patterned films. You may also create your own patterns. In order to achieve creative light patterns.

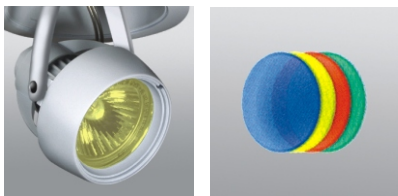


Coloured Filters

Available in colours 25, 42, 55, 85



Honeycomb Louvre


Available in colour 10



Refractor

Filter for elliptical distribution of the light flow.

Available in colour 41



11


75

Mini-Swinger-Slick



The system of "SLICK" has been designed for multiple application of Swinger.
Possible use of combined light sources.
Application in continuous line.

Dimension(mm)	Product Name	Art.	Ceiling Opening (mm)
	Mini-Swinger-Slick-1	2245	130x130
	Mini-Swinger-Slick-2	2070	262x130
	Mini-Swinger-Slick-3	2071	395x130
	Mini-Swinger-Slick-4	2248	528x130
	Mini-Swinger-Slick-5	2249	244x244



11

75